## PRODUCT ID: 68304

DOT LED Blank-Out Sign

#### MODEL

DOT3535W-A499/100-240VAC



### **DIMENSIONS**

35" H x 35" W x 6.5" D (est. 67.065 lbs)

## **CLASS**

Class: DOT Series

Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5"

Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

### **ELECTRICAL**

Input Voltage: 100-240 VAC
Photodimming: IR photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
R10-11B NO TURN ON RED	White Narrow Angle LED	5.0"	0.234-0.097

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com Website: www.signal-tech.com



02142024 | EMC

# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

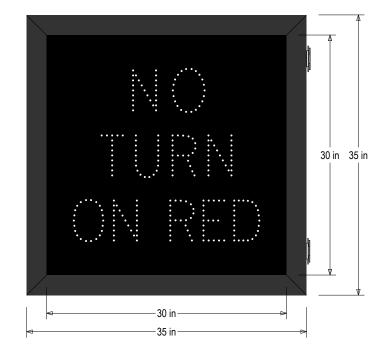



#### Frame Detail

