

**PRODUCT ID: 68380**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT2375RG-100TS/100-240VAC

**DIMENSIONS**  
23" H x 75" W x 6.5" D (est. 111.726 lbs)



**CLASS**  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)  
Faces: Single Faced Sign  
Finish: Powdercoat Black

**ELECTRICAL**  
Input Voltage: 100-240 VAC  
Photodimming: IR photocells for auto photodimming  
Power Supplies: Redundant  
UL/cUL Listed: Listed for wet locations

**MESSAGE**  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Open	Green Narrow Angle LED	12.0"	0.770-0.321
CLOSED	Red Narrow Angle LED	12.0"	0.346-0.144


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com




**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

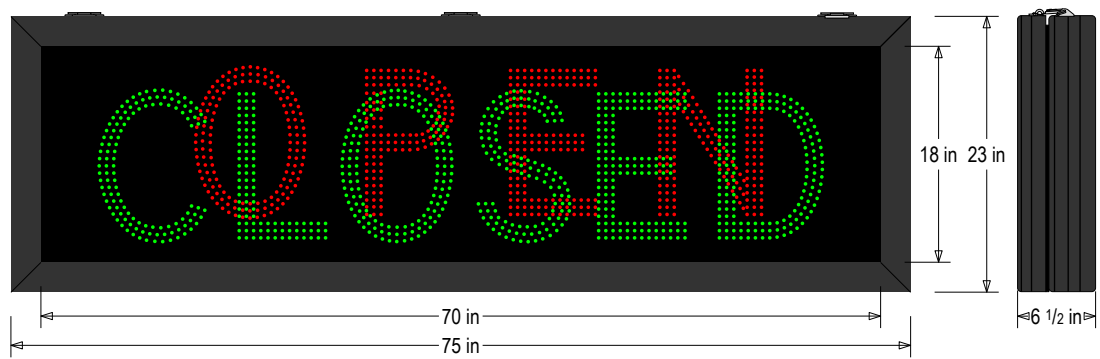

**Sample Display Options**

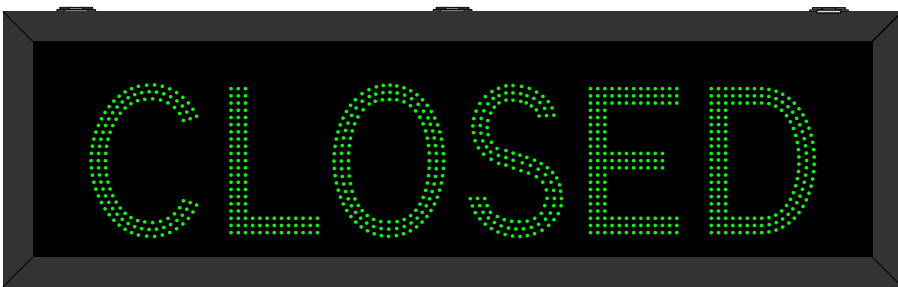

**Frame Detail**

