

## PRODUCT ID: 9957

### DOT LED Blank-Out Sign

#### MODEL

DOT3030RW-626



#### DIMENSIONS

30" H x 30" W x 5" D (est. 47.221 lbs)

#### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.

Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

Integral Hood: Optional hood available

Mounting Channel:

#### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations


#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

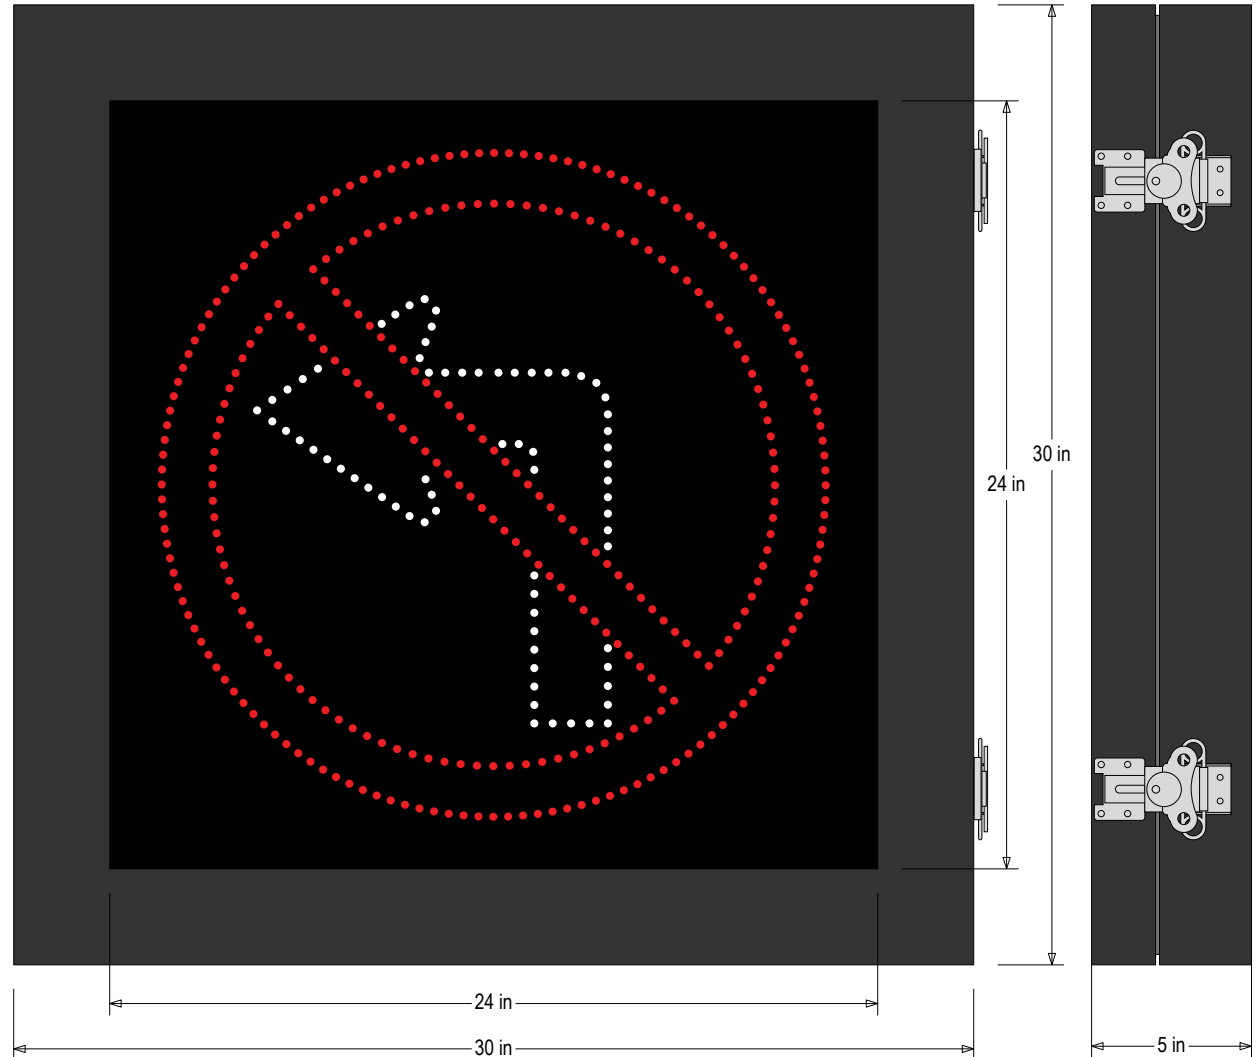

#### MESSAGE

#### LED/COLOR

#### HEIGHT

#### AMPS

MESSAGE	LED/COLOR	HEIGHT	AMPS
R3-2 NO LEFT TURN SYMBOL	Red, White Narrow Angle LED	21.0", 13.0"	0.251-0.105

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com

Proudly Made in the USA