

Ceiling Mount CM21

PRODUCT NUMBER
1964

DIMENSIONS
4" H x 21" W x 2" D

INSTALLATION METHOD
Bolted to ceiling surface with appropriate fasteners.


SYSTEM USES
Available for all 21" wide signs.

CONSTRUCTION
1/8" thick extruded aluminum angle bracket

FINISH
Standard Cabinet Color: Duranodic Bronze
Custom colors available upon request

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

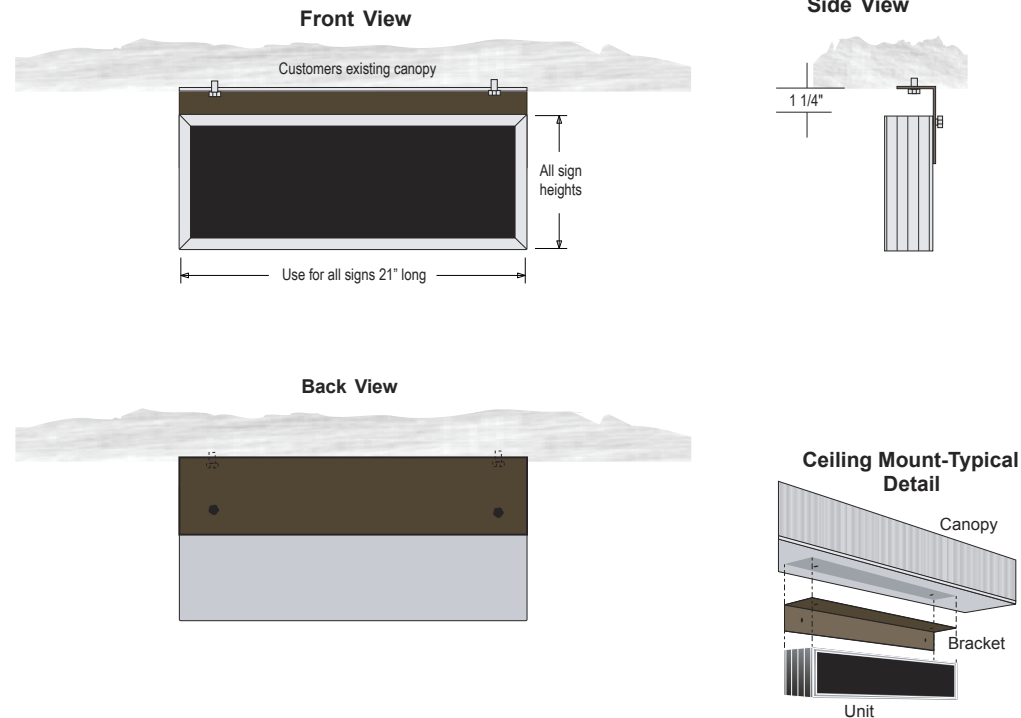

Ceiling Mount


- Remove the back panel.
- Mount the ceiling bracket to the desired surface (*Fasteners Not Supplied*).
- Mount the back panel to the ceiling bracket (*Fasteners Not Supplied*).



Note: Make appropriate wiring connections per local codes.

Note: Do not over tighten or distort back panel. Hang the cabinet on the top edge of the back panel

- Hinge cabinet back and replace the screws that were removed in step one on the reverse side.

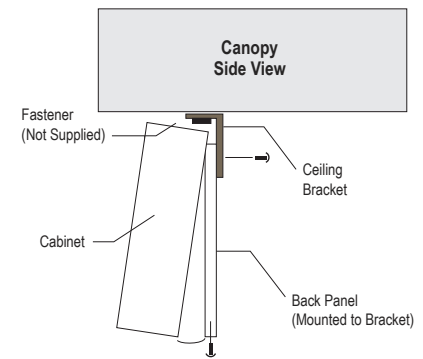

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Proudly Made in the USA