## PRODUCT ID: 68184

DOT LED Blank-Out Sign

#### MODEL

DOT4129RW-D601/100-240VAC



#### DIMENSIONS

41" H x 29" W x 6.5" D (est. 77.182 lbs)

#### **CLASS**

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Powdercoat Black

#### **ELECTRICAL**

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

#### LED/COLOR | HEIGHT | AMPS **MESSAGE**

No Left Turn Symbol w/TRAIN Red, White Narrow Angle LED 21.0", 6.0" 0.522-0.217

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave. Erie. PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300

Email: sales@signal-tech.com Website: www.signal-tech.com



# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

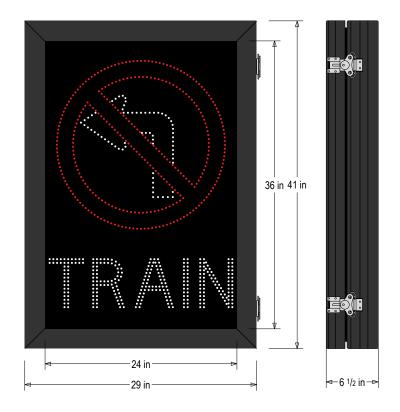

Frame Detail

