

PRODUCT ID: 67652

DOT LED Blank-Out Sign

MODEL

DOT4141WAR-P627/100-240VAC



DIMENSIONS

41" H x 41" W x 6.5" D (est. 98.184 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations


MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

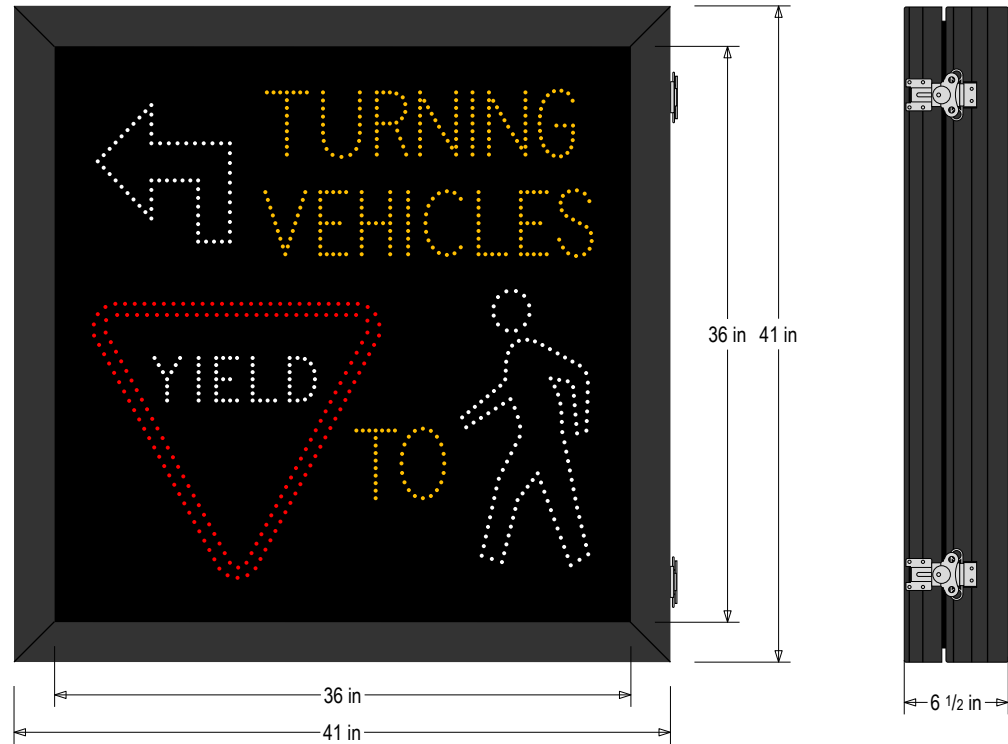

MESSAGE

LED/COLOR

HEIGHT

AMPS

Left Turn Arrow	TURNING VEHICLES	YIELD to Pedestrians	White, Amber, Red Narrow Angle LED	8.5", 3.075", 17.102", 2.75"	0.501-0.209
-----------------	------------------	----------------------	------------------------------------	------------------------------	-------------

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com



Frame Detail

